



# FIXED CALIPER

P2.24

X 2.060.01



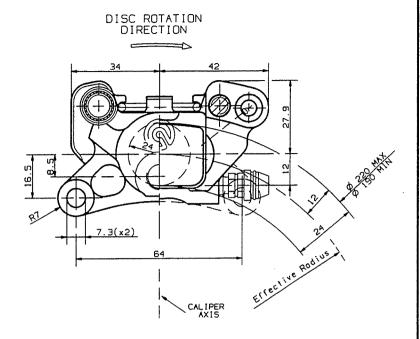


## **DESCRIPTION**

Fixed caliper with 2 opposed pistons, realized by semicalipers joined by bolts. Pads are supported by one clip which allows a quickly pads remove.

Construction Material: Aluminium Alloy Hard Oxidation.

Operating fluid: brake fluid DOT4.

### PADS SHAPE AND DIMENSIONS



LAST UPDATE: 19/01/1994

## TECHNICAL CHARACTERISTICS

Piston number and diameter: 2

24 mm 40 bar Average pad surface (1 pad):

8.0 cm<sup>2</sup>

MAX working pressure:

Weight (with sintered pads):

0.198 Kg

#### CONFIGURATION

CODE CHURACT	BODY	MOUNT.	USABLE DISCS	
	COLOR	SIDE	THICKNESS	
X 2.060.01	RACING	SX	6.0 mm (carbon disc) 4.0 mm (steel disc)	

### AVAILABLE SPARE PARTS

COOE PA	BLEEDER SCREW		800TS	PADS/ MATERIAL	PADS/ MATERIAL
X 2.060	.01	X 1.017.44	105.1502.10	107.6930.70 (FRENDO 222)	107.6930.71 (MIBA)