


DESCRIPTION

Fixed caliper with 2 opposed pistons, realized by semicalipers joined by bolts. Pads are supported by one pin.
 Construction Material: Aluminium Alloy.
 Operating fluid: brake fluid DOT4.

N.B.: drawing shows caliper Code 20.6951.12.
 Caliper Code 20.6951.22 specular.

PADS SHAPE AND DIMENSIONS

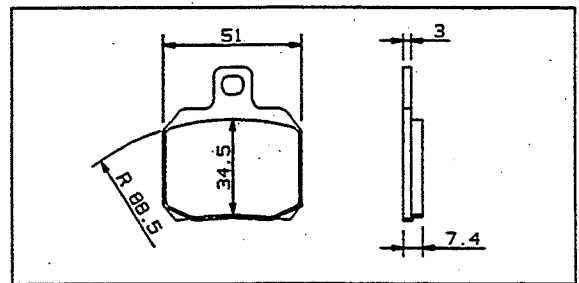

TECHNICAL CHARACTERISTICS

Pistons number and diameter:	2 34mm	Average pad surface (1 pad):	16.1 cm ²
MAX working pressure:	70bar	Weight (with not sintered pads):	0.605 Kg
A) Disc position (TOLERANCE):	±0.5mm		

CONFIGURATION

CODE CALIPER / CHARACT.	PADS FRICTION MATERIAL	BODY COLOR	MOUNT. SIDE	USABLE DISCS THICKNESS	BRAKE FLUID FOR PADS WEAR
20.6951.12 / 22	TT H38 GF (TOSHIBA)	BLACK	SX / DX	5.0 mm	7.4 cm ³

AVAILABLE SPARE PARTS

CODE CALIPER / SPARE PARTS	PADS	BLEEDER SCREW	DUST COVER	PIN SPLIT SPRING
20.6951.12 / 22	107.6949.12	105.3387.10	105.1502.10	120.5116.11