



# FIXED CALIPER

P 32 G

20 .6950 .30



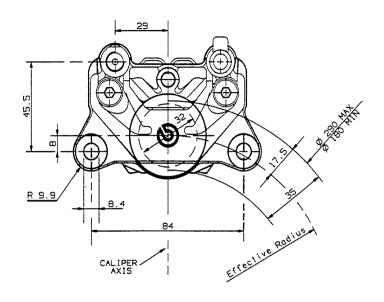


#### **DESCRIPTION**

Fixed coliper with 2 opposed pistons, realized by semicalipers joined by bolts. Pads are supported by one pin. Construction Material: Aluminium Alloy. Operating fluid: brake fluid DOT4.

 $\frac{\text{N.B.:}}{\text{Caliper Code 20.6950.40 specular.}}$ 

# PADS SHAPE AND DIMENSIONS



## TECHNICAL CHARACTERISTICS

Pistons number and diameter: 2

32 mm

Average pad surface (1 pad):

16.1 cm<sup>2</sup>

MAX working pressure:

70bar

(with not sintered pads):

A) Disc position (TOLERANCE):

Weight ±0.5 mm

0.600 Kg

### CONFIGURATION

CODE CALIPER CT.	PADS FRICTION MATERIAL	BODY COLOR	MOUNT. SIDE	USABLE DISCS THICKNESS	BRAKE FLUID FOR PADS WEAR
20.6950.30	FERIT I/D 450 FF	RED	SX DX	5.0 mm	6.6 cm³

### AVAILABLE SPARE PARTS

CODE PARTS	PADS	BLEEDER	DUST	PIN
CALIPER		SCREW	COVER	CLIP
20.6950.30	107.6949.10	105.3387.30	105.1502.20	120.5116.11